Hastline

INDIRECT WATER HEATER



6



Commercial Quality & Capability. Residential Affordability.

- 1 Domestic Water Hot and Cold Top Connection-HL 30, HL 40, HL 50. Hot Only Top Connection-HL 80, HL 119. Cold Only Bottom/Side-HL 80, HL 119.
- 2 Coil Connections Include Dielectric Unions For Both the Inlet and Outlets
- 3 2" Foam Insulation
- 4 Heavy-Duty Steel Jacket
- 5 Replaceable Extra-Thick Magnesium Anode Rod
- 6 Corrosion Resistant Porcelain-Coated Smooth Coil and Interior Tank Walls
- Immersion Aquastats Standard On HL 40, 50, 80, 119 Models
- Surface-Mounted Thermostat
- Self-Cleaning Drain Valve
- Factory Installed T&P Valve

(HL 30 Shown)


An ISO 9001-2000 Certified Company


Hotline Indirect Water Heater

Specifications*

MODEL	STORAGE	DIMENSIONS SHIPPING									
NO.	CAPACITY	А	В	С	D	E	F	G	Н	WEIGHT	
HL 30	30 GAL.	39"	20"	8"	3/4"	3/4"	3/4"	30¾"	31/2"	140 LBS.	
HL 40	40 GAL.	47"	20"	8"	3/4"	3/4"	3/4"	40 ³ / ₄ "	31/2"	200 LBS.	
HL 50	50 GAL.	48"	22"	8"	3/4"	3/4"	3/4"	40¾"	3 ¹ / ₂ "	220 LBS.	
HL 80	80 GAL.	59"	24"	—	11/2"	—	1"	52"	4 ³ / ₄ "	286 LBS.	
HL 119	119 GAL.	64 ¹ /4"	28"	—	1 1/2"	—	1"	57 ¹ / ₂ "	4 ¾"	372 LBS.	

NOTES: Potable outlet water temperature at 135° F as per D.O.E. • Boiler output should be at least 74,000 BTU/h. *Due to ongoing product development specifications and dimensions subject to change without notice.

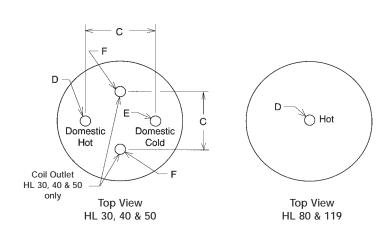



Hot Line Delivery In GPH

OUTPUT BTUH	HL30	HL40	HL50	HL80	HL119
74,000	115	125	140	—	—
80,000	125	140	150	—	—
100,000	140	150	165	—	—
150,000	150	160	170	185	—
175,000	—	—	—	200	250
200,000	—	_	—	210	260

70°F Rise (50°F/120°F) with 180°F boiler output temperature. 15-42 Grundfos/Taco 008 circulation flow rate of minimum 6 GPM. The Hotline is available under these fine ECR brands:







2201 Dwyer Avenue, Utica, NY 13504-4729 Phone: 315-797-1310 Fax: 315-797-3762 E-mail: information@ecrinternational.com www.ecrinternational.com In Canada Contact: ECR International Ltd. - Olsen Division P.O. Box 900, 6800 Base Line Wallaceburg, Ontario, Canada N8A 5E5 Phone: (519) 627-0791 Fax: (519) 627-4719 E-mail: info@ecrltd.com www.ecrltd.com

